

HEXAGO


2022
HEATER COLLECTION

HEXAGO LLC
WWW.THEHEXAGO.COM
SALES@THEHEXAGO.COM

OFFICE AND WAREHOUSE

- SAN JOSE , CA
- IRVINE, CA
- DALLAS, TX
- CINCINNATI, OH

Our future growth relies on competitiveness and innovation, skills and productivity;
Founded in the ingenuity of our people.

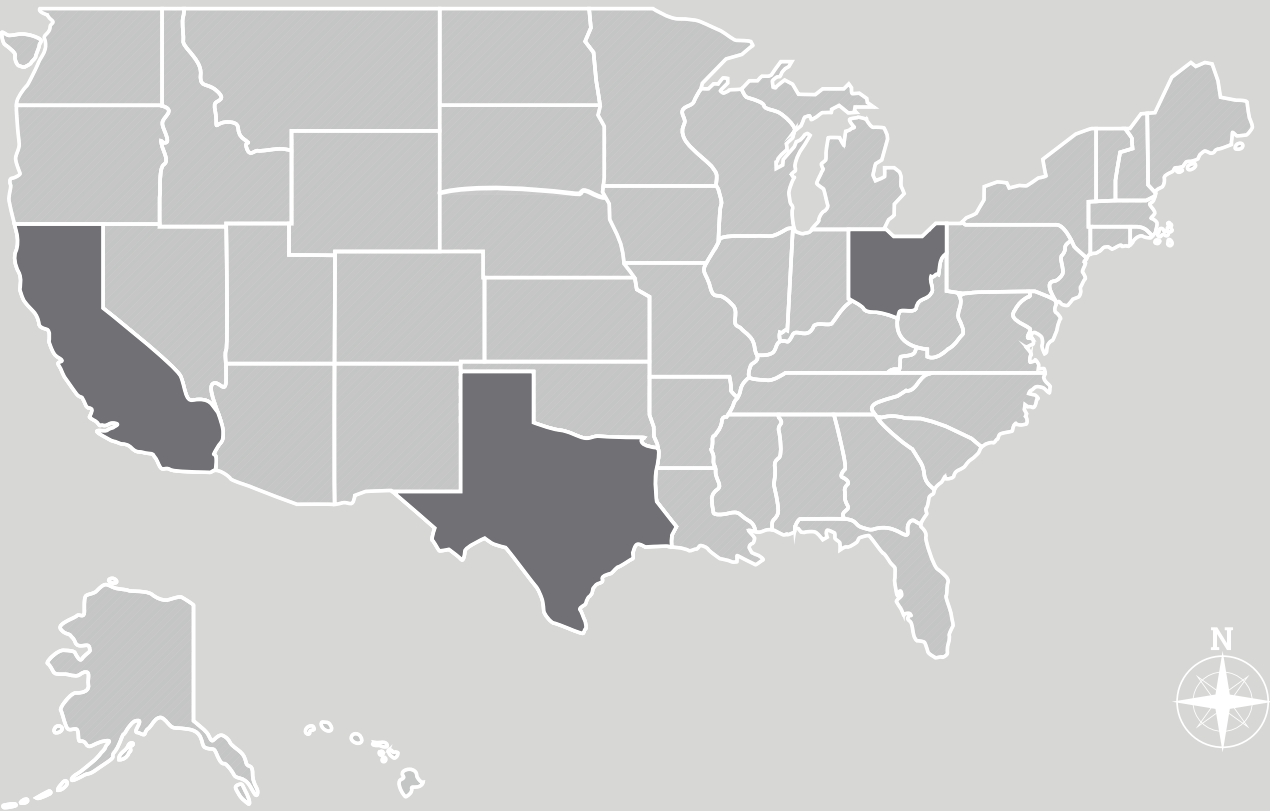

HEXAGO

04

Outdoor
Patio Heaters

21

Forced Air
Propane Heaters

29

Forced Air
Kerosene Heaters

35

Electric
Garage Heaters

HEXAGO

OUTDOOR PATIO HEATERS

As summer winds down, nights start to get colder and dark earlier; but you might not be ready to give up spending evenings on the patio just yet. Hexago patio heaters will allow you to keep holding your outdoor area gatherings well into the fall and winter, as they give off the perfect amount of heat to keep you toasty warm. Hexago leads the market in premium outdoor patio heaters with uncompromised performance in the most rigorous of commercial and residential applications.






MALIBU

40,000 BTU Premium Pyramid Propane Gas Patio Heater

Model: HI-HEAT-PH08-S-40000BTU

The 40,000 BTU premium pyramid patio heater with the stylish ceramic glass tube has a visible flame for decorative effect, surrounded by a protective cage. The slim design and sleek powder-coated finish bring a modern look to any outdoor living area. It provides balanced warmth directed toward people and deep into the open areas of 20 feet radiant circle.

BTU range from 14,000 to 40,000. Can work 11 to 32 hours by using the standard 20 lbs. propane tank. The electronic igniter switch makes the operation simple and quick. Tilt safety technology always ensures a risk-free operation. One-year limited manufacturer warranty with ETL Certification.

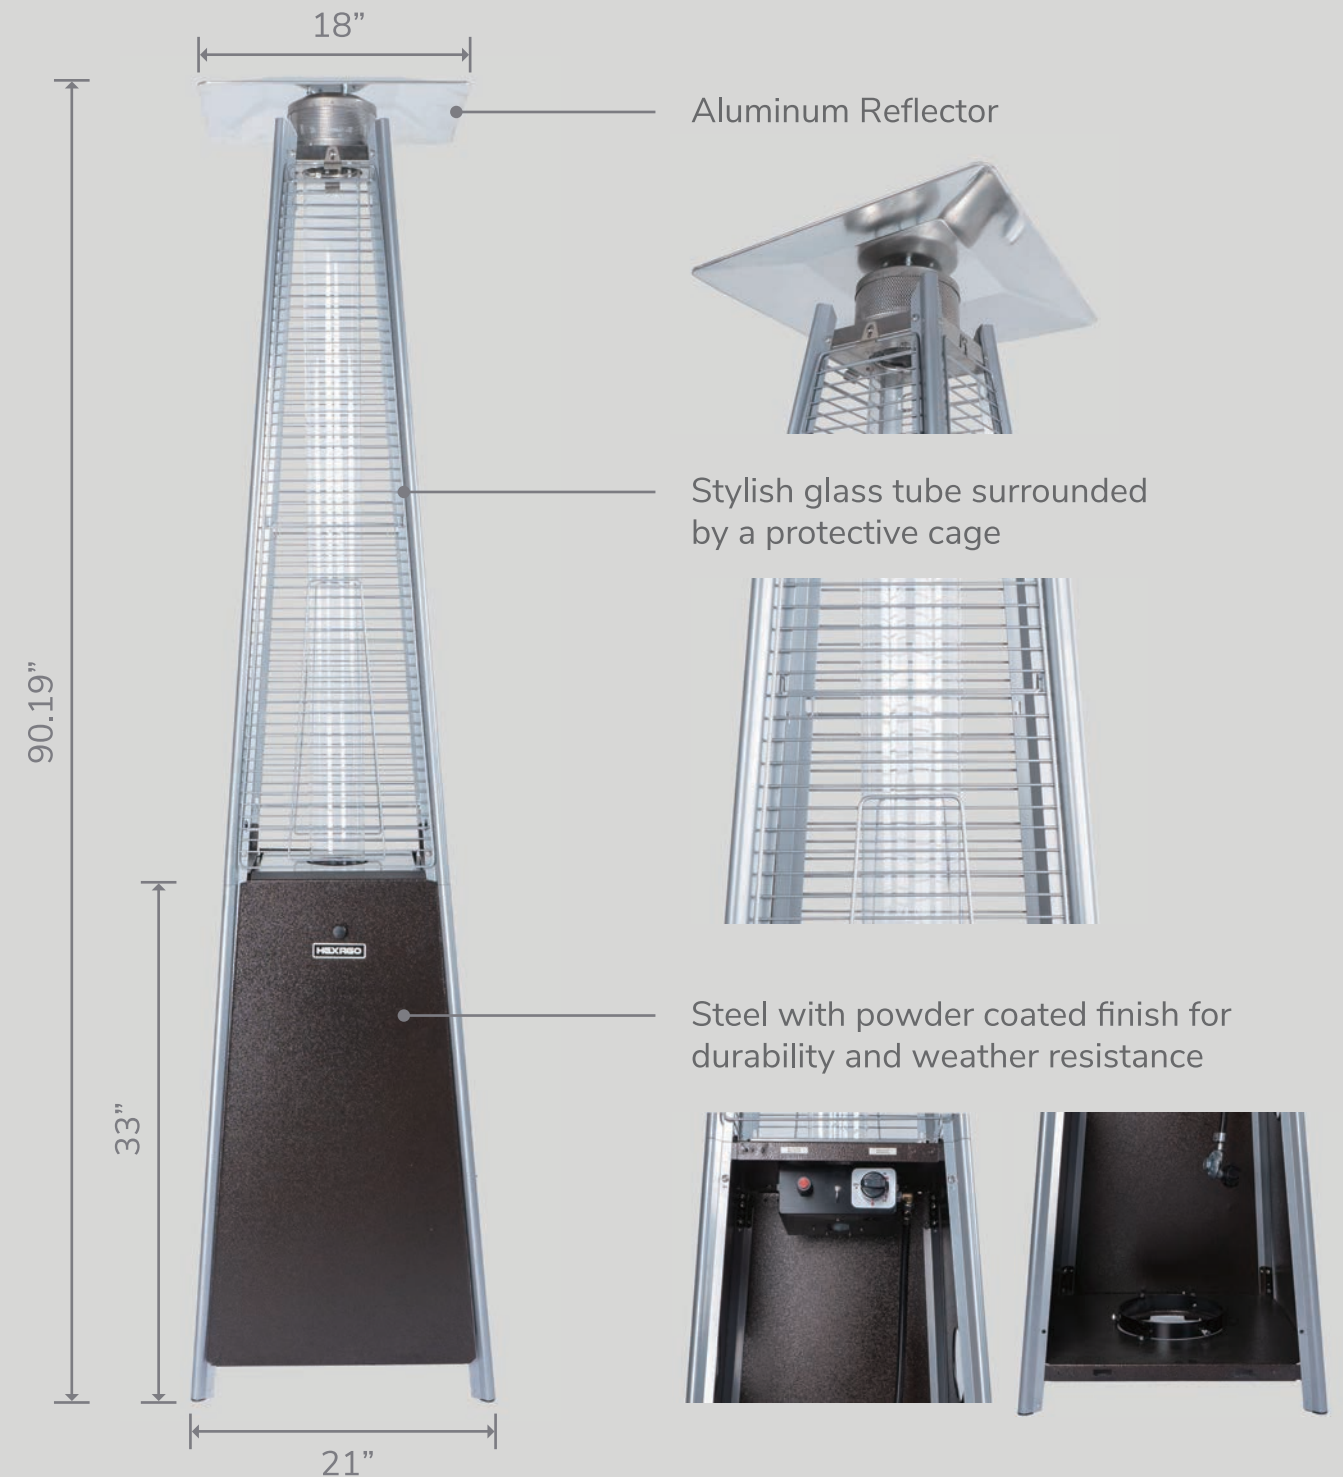

Features

- Visible Flame with Ceramic Glass Tube
- Automatically Shut Off When Tilting 30°
- Anti-Tip Base Design
- ETL Certification
- 14,000 to 40,000 BTU
- Electronic Pulse Ignition
- Stainless Steel Burner
- Powder Coated Finish
- Pulleys Included
- Uses 20 lbs. Propane Tank




SONORAN

40,000 BTU Premium Pyramid Stainless Steel Propane Gas Patio Heater

Model: HI-HEAT-PH08-SSL-40000BTU

The 40,000 BTU premium stainless steel pyramid patio heater with the stylish ceramic glass tube has a visible flame for decorative effect, surrounded by a protective cage. The slim design and sleek stainless steel finish bring a modern look to any outdoor living area. It provides balanced warmth directed toward people and deep into the open areas of 20 feet radiant circle.

BTU range from 14,000 to 40,000. Can works 11 to 32 hours by using the standard 20 lbs. propane tank. The electronic igniter switch makes the operation simple and quick. Tilt safety technology always ensures a risk-free operation. One-year limited manufacturer warranty with ETL Certification.

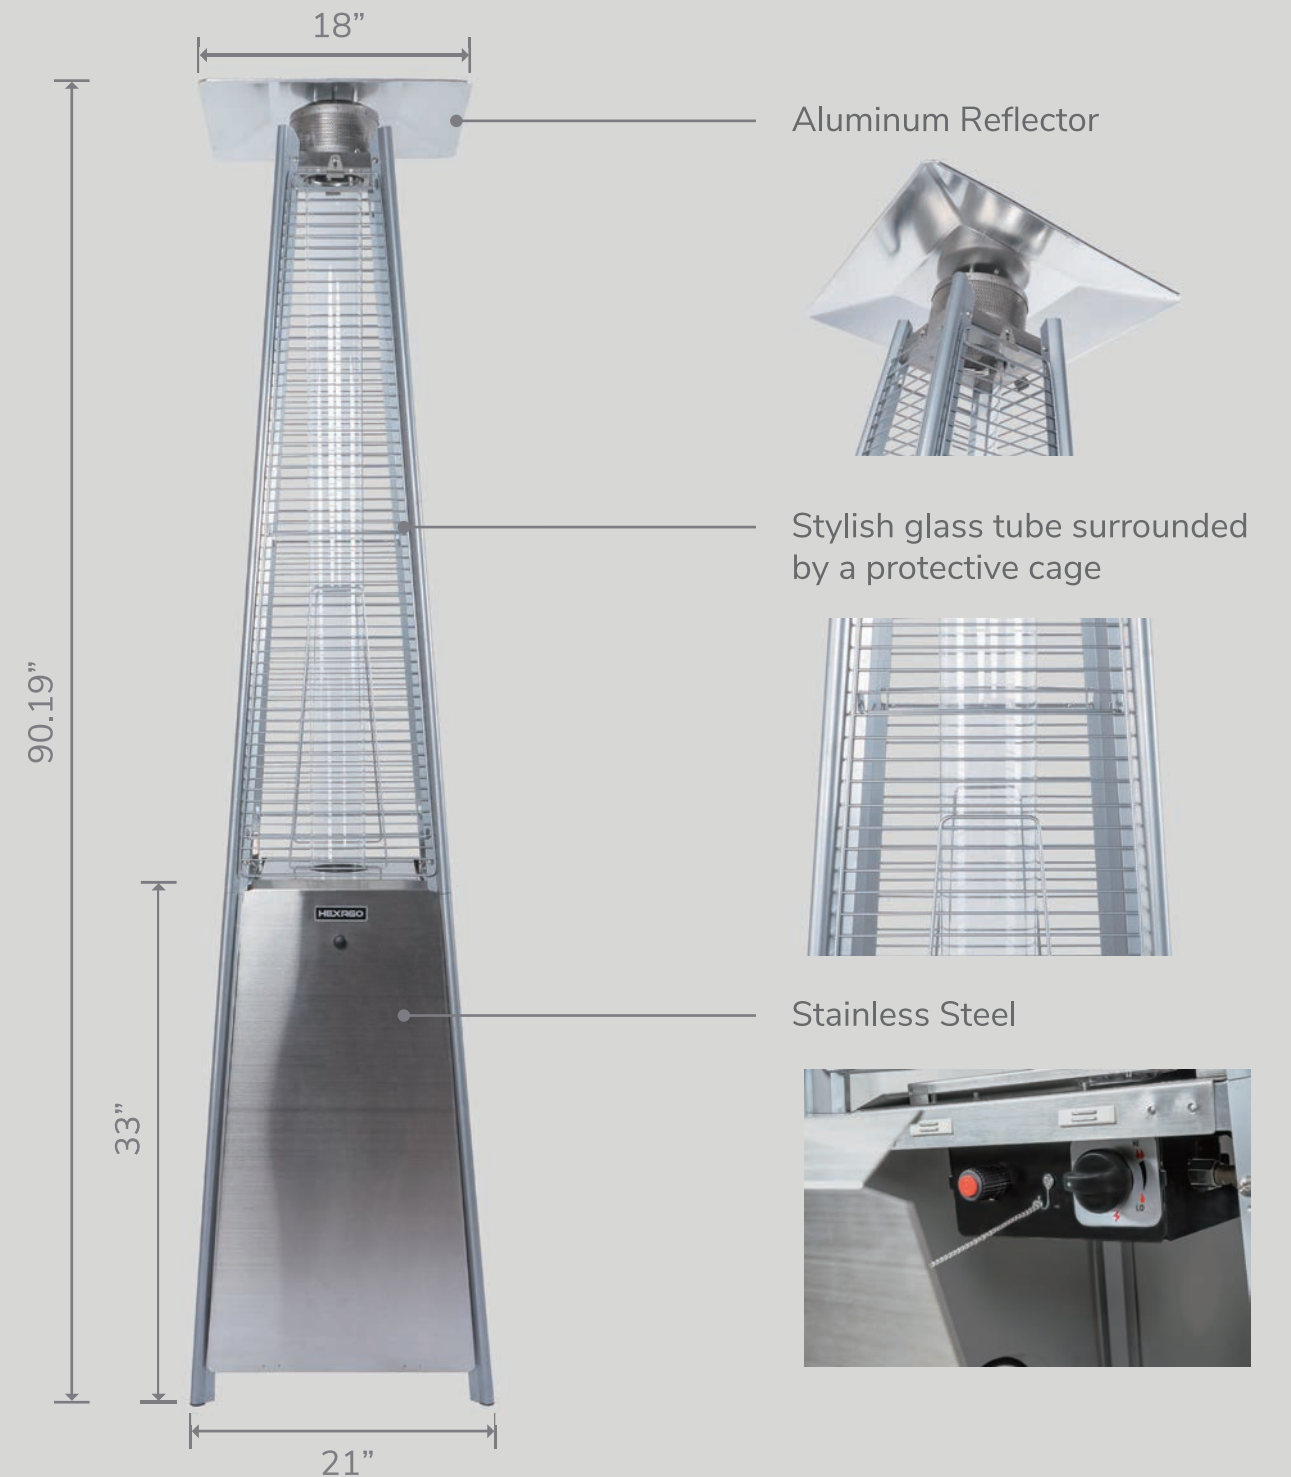

Features

- Visible Flame with Ceramic Glass Tube
- Automatically Shut Off When Tilting 30°
- Anti-Tip Base Design
- ETL Certification
- 14,000 to 40,000 BTU
- Electronic Pulse Ignition
- Stainless Steel Burner
- Stainless Steel Finish
- Pulleys Included
- Uses 20 lbs. Propane Tank



MOJAVE

50,000 BTU Premium Propane Gas Patio Heater

Model: HI-HEAT-PH01-V-50000BTU

The 50,000 BTU premium patio heater provides balanced warmth directed toward people and deep into the open areas of 24 feet radiant circle. It's a commercial grade infrared heating solution that you can always trust in reliability and longevity.

BTU range from 20,000 to 50,000. Can works 8 to 20 hours by using the standard 20 lbs. propane tank. Tilt safety technology always ensures a risk-free operation. One-year limited manufacturer warranty with ETL Certification.



Features

- Automatically Shut Off When Tilting 30°
 - Anti-Tip Base Design
 - ETL Certification
 - 20,000 to 50,000 BTU
 - Electronic Pulse Ignitor
- Stainless Steel Burner
 - Powder Coated Finish
 - Pulleys Included
 - Uses 20 lbs. Propane Tank



TOFINO

42,000 BTU Propane Gas Patio Heater with Table and Side Door

Model: HI-HEAT-PH01-SB-42000BTU

The 42,000 BTU premium patio heater provides balanced warmth directed toward people and deep into the open areas of 20 feet radiant circle. This model features a convenient table that people can enjoy their drinks and snacks in a beautiful outdoor area. The side door makes it easy to adjust and replace the propane tank.

BTU range from 15,000 to 42,000. Can work 10 to 28 hours by using the standard 20 lbs. propane tank. Tilt safety technology always ensures a risk-free operation. One-year limited manufacturer warranty with ETL Certification.



Features

- Automatically Shut Off When Tilting 30°
- Anti-Tip Base Design
- ETL Certification
- 15,000 to 42,000 BTU
- Piezo Ignitor

- Stainless Steel Burner
- Powder Coated Finish
- Pulleys Included
- Uses 20 lbs. Propane Tank
- Table and Side Door Included



BIG SUR

47,000 BTU Traditional Propane Gas Patio Heater

Model: HI-HEAT-PH07-S-47000BTU

The 47,000 BTU traditional patio heater provides balanced warmth directed toward people and deep into the open areas of 20 feet radiant circle.

BTU range from 17,000 to 47,000. Can work 9 to 25 hours by using the standard 20 lbs. propane tank. Tilt safety technology always ensures a risk-free operation. One-year limited manufacturer warranty with ETL Certification.



Features

- Automatically Shut Off When Tilting 30°
- Anti-Tip Base Design
- ETL Certification
- 17,000 to 47,000 BTU
- Piezo Ignitor

- Stainless Steel Burner
- Powder Coated Finish
- Pulleys Included
- Uses 20 lbs. Propane Tank




CATALINA

47,000 BTU Stainless Steel Propane Gas Patio Heater

Model: HI-HEAT-PH07-SSL-47000BTU

The 47,000 BTU stainless steel patio heater provides balanced warmth directed toward people and deep into the open areas of 20 feet radiant circle. The slim design and sleek stainless finish bring a modern look to any outdoor living area.

BTU range from 17,000 to 47,000. Can works 9 to 25 hours by using the standard 20 lbs. propane tank. Tilt safety technology always ensures a risk-free operation. One-year limited manufacturer warranty with ETL Certification.

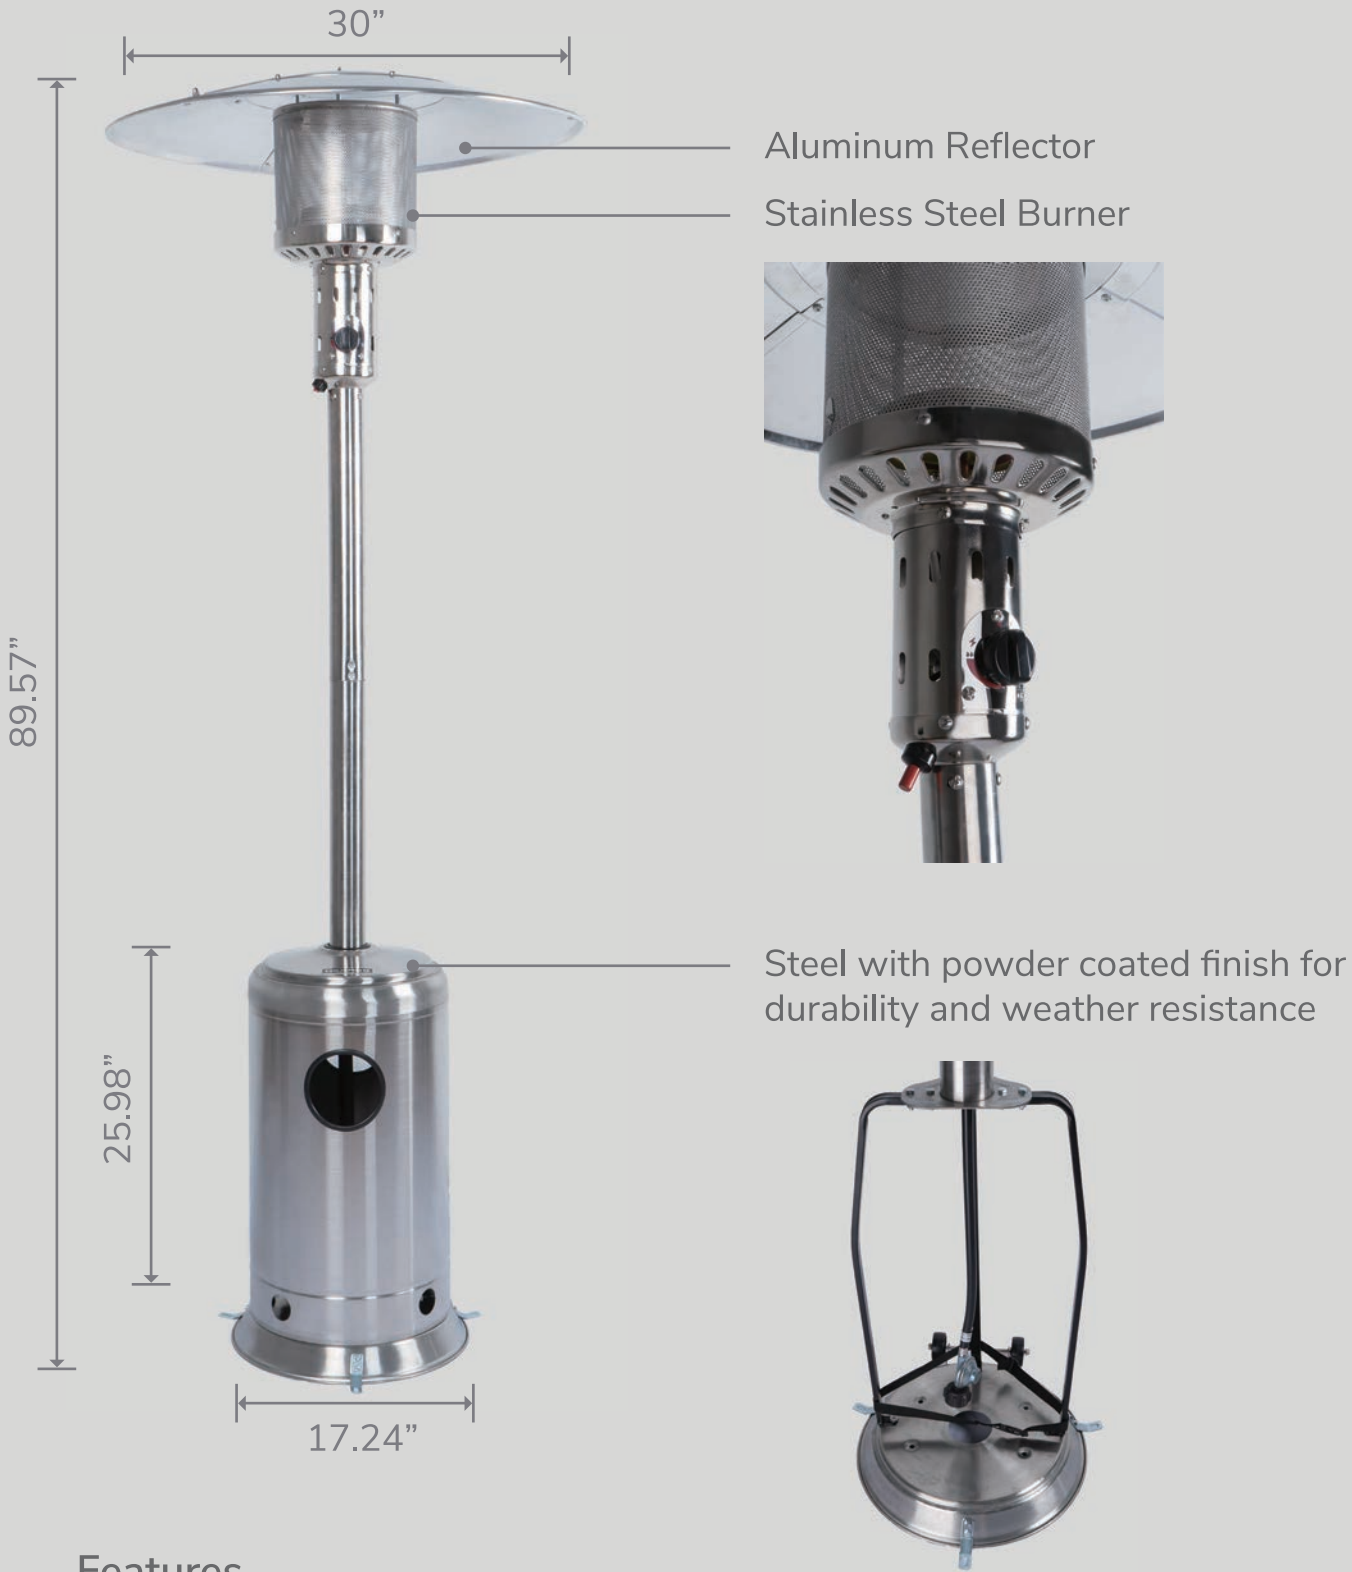

Features

- Automatically Shut Off When Tilting 30°
- Anti-Tip Base Design
- ETL Certification
- 17,000 to 47,000 BTU
- Piezo Ignitor
- Stainless Steel Burner
- Powder Coated Finish
- Pulleys Included
- Uses 20 lbs. Propane Tank

HEXAGO



MALIBU



SONORAN



MOJAVE

PRODUCT NAME	40,000 BTU Premium Pyramid Propane Gas Patio Heater	40,000 BTU Premium Pyramid Stainless Steel Propane Gas Patio Heater	50,000 BTU Premium Propane Gas Patio Heater
MODEL NUMBER	HI-HEAT-PH08-S-40000BTU	HI-HEAT-PH08-SSL-40000BTU	HI-HEAT-PH01-V-50000BTU
COLOR FINISH	Bronze & Silver	Silver	Bronze & Silver
CONSTRUCTION	Steel & Stainless Steel & Ceramic Glass	Stainless Steel & Ceramic Glass	Steel & Stainless Steel
FUEL TYPE	LPG	LPG	LPG
IGNITOR	Automatic by Battery	Automatic by Battery	Automatic by Battery
HEATING METHOD	Radiant	Radiant	Radiant
SAFETY FEATURE	Anti-tip Switch	Anti-tip Switch	Anti-tip Switch
CONTROL TYPE	Adjustable Control Knob	Adjustable Control Knob	Adjustable Control Knob
MIN BTU	14,000	14,000	20,000
MAX BTU	40,000	40,000	50,000
CARTON DIMENSION (INCH)	53.54*21.26*12.4	53.54*21.26*12.4	18.11*18.11*35.43
CARTON GROSS WEIGHT (LBS)	66.14	66.14	46.3
PRODUCT DIMENSION (INCH)	21*21*90.2	21*21*90.2	32*32*86.1
PRODUCT NET WEIGHT (LBS)	57.32	57.32	44.09
LOADING QTY 20GP	125	125	150
LOADING QTY 40GP	250	250	312
LOADING QTY 40HQ	292	292	375
GAS CONSUMING RATE LB/HR	1.76	1.76	2.42
MIN HOURS ON 20 LBS PROPANE GAS TANK	11.4	11.4	8.3
MAX HOURS ON 20 LBS PROPANE GAS TANK	32.5	32.5	20.7
WARRANTY	1 Year Limited Warranty	1 Year Limited Warranty	1 Year Limited Warranty
CERTIFICATION	ETL	ETL	ETL

HEXAGO



TOFINO



BIG SUR



CATALINA

PRODUCT NAME	42,000 BTU Propane Gas Patio Heater with Table and Side Door	47,000 BTU Traditional Propane Gas Patio Heater	47,000 BTU Stainless Steel Propane Gas Patio Heater
MODEL NUMBER	HI-HEAT-PH01-SB-42000BTU	HI-HEAT-PH07-S-47000BTU	HI-HEAT-PH07-SSL-47000BTU
COLOR FINISH	Bronze & Silver	Bronze & Silver	Silver
CONSTRUCTION	Steel & Stainless Steel	Steel & Stainless Steel	Stainless Steel
FUEL TYPE	LPG	LPG	LPG
IGNITOR	Manual Piezo	Manual Piezo	Manual Piezo
HEATING METHOD	Radiant	Radiant	Radiant
SAFETY FEATURE	Anti-tip Switch	Anti-tip Switch	Anti-tip Switch
CONTROL TYPE	Adjustable Control Knob	Adjustable Control Knob	Adjustable Control Knob
MIN BTU	15,000	17,000	17,000
MAX BTU	42,000	47,000	47,000
CARTON DIMENSION (INCH)	18.11*18.11*35.43	17.72*17.72*28.35	17.72*17.72*28.35
CARTON GROSS WEIGHT (LBS)	38.58	34.17	34.17
PRODUCT DIMENSION (INCH)	32*32*89.8	30*30*89.6	30*30*89.6
PRODUCT NET WEIGHT (LBS)	35.27	30.86	30.86
LOADING QTY 20GP	150	180	180
LOADING QTY 40GP	312	390	390
LOADING QTY 40HQ	375	450	450
GAS CONSUMING RATE LB/HR	1.98	2.24	2.24
MIN HOURS ON 20 LBS PROPANE GAS TANK	10.1	8.9	8.9
MAX HOURS ON 20 LBS PROPANE GAS TANK	28.3	24.7	24.7
WARRANTY	1 Year Limited Warranty	1 Year Limited Warranty	1 Year Limited Warranty
CERTIFICATION	ETL	ETL	ETL

FORCED AIR PROPANE HEATERS

The Hexago Forced Air Propane Heaters now come standard with Hexago's Quiet Burner Technology. It runs 50% quieter than the traditional forced air heaters. It delivers powerful and reliable heat for ventilated spaces. Heavy duty design built for the job site and workshop. It's built with the latest safety technology and includes a rigorously tested cold-start system. A standard 10 ft hose and the regulator are included. Hexago has the ideal solution for your heating needs. Plug the heater into a 110v outlet, hook up the hose and regulator to a standard 20 lbs. or larger propane tank, and you are ready to enjoy it whether on the job site or in the workshop.



40,000 BTU Forced Air Propane Gas Heater

Model: HI-HEAT-GAS-40K



Features


- CSA Listed
- Gas Leak Cut-Off Protection
- Deflation and Ignition Operate Design
- 10 Feet Hose and the Regulator are Included
- Special Nozzle with Strong Oxygen Supply Makes Combustion Completely
- Ideal for Construction Sites, Utility/Farm Buildings, Sports Events, Barns, and Factories
- Overheat Protection
- Ignition - Piezo Ignitor



High Output Fan; Overheat Protection;
Gas Leak Cut-Off Protection



Piezo Ignitor ; Valve Button

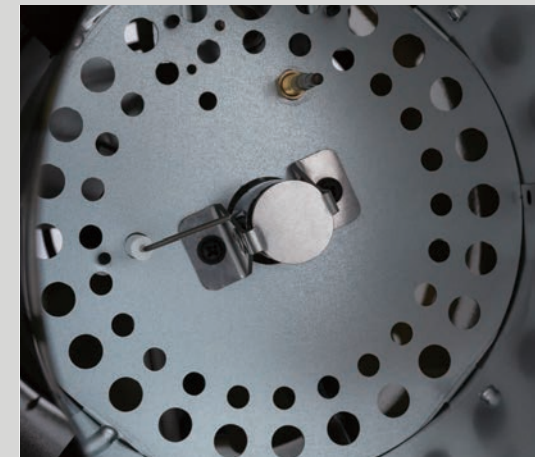

Durability and Perfect Alignment for
Optimal Airflow



Heavy Duty Rugged Steel
Construction



Sturdy Handle



10 ft Hose & Regulator



Model: HI-HEAT-GAS-60K



Model: HI-HEAT-GAS-85K



Model: HI-HEAT-GAS-125K



Model: HI-HEAT-GAS-150K


60,000 ~ 150,000 BTU
Adjustable Forced Air Propane Gas Heater

Features

- CSA Listed
- Overheat Protection
- Gas Leak Cut-Off Protection
- Height Adjustable
- Special Nozzle with Strong Oxygen Supply Makes Combustion Completely
- Ideal for Construction Sites, Utility/Farm Buildings, Sports Events, Barns, and Factories
- Continuously Adjustable Output
- Deflation and Ignition Operate Design
- Ignition - Automatic Electric Spark Ignitor
- 10 Feet Hose and the Regulator are Included



High Output Fan; Overheat Protection;
Gas Leak Cut-Off Protection

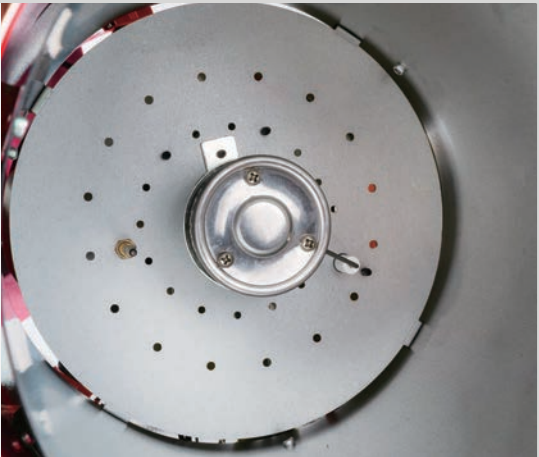

Durability and Perfect Alignment for
Optimal Airflow



Ignition - Automatic Electric
Spark Ignitor



Height Adjustable



Sturdy Handle



10 ft Hose & Regulator

HEXAGO



PRODUCT NAME	40,000 BTU Forced Air Propane Gas Heater	60,000 BTU Adjustable Forced Air Propane Gas Heater	85,000 BTU Adjustable Forced Air Propane Gas Heater
MODEL NUMBER	HI-HEAT-GAS-40K	HI-HEAT-GAS-60K	HI-HEAT-GAS-85K
ENVIRONMENT THAT PRODUCT SUITABLE FOR	With proper ventilation it can be used in both commercial or construction sites both indoor and outdoor; not exposed to rain and snow weather		
HEATS COVERAGE AREA (SQ. FT)	1000	1,000 - 1,500	1,250 - 2,125
MAX BTU	40,000	60,000	85,000
MIN BTU	40,000	40,000	50,000
CFM (REFERENCE ONLY)	250	300	300
CARTON GROSS WEIGHT (LBS)	12.79	15.21	16.98
PRODUCT NET WEIGHT (LBS)	8.38	10.80	12.13
PRODUCT NET DIMENSION (INCH)	18.94*7.68*13.5	17.13*8.86*13.98	20*8.86*14.96
CORD LENGTH (INCH)	5	5	5
CORD TYPE	SJTW	SJTW	SJTW
PLUG TYPE	5-15P	5-15P	5-15P
PRIMARY MATERIAL	Steel coated with nti-rusted powder	Steel coated with nti-rusted powder	Steel coated with nti-rusted powder
POWER SUPPLY	115V/60HZ	115V/60HZ	115V/60HZ
AMPS	0.6 A	0.95 A	0.95 A
POWER RATE	30W	48W	48W
FUEL TYPE	Propane	Propane	Propane
FUEL CONSUMING RATE (LB/HR)	1.8	1.8~2.7	2.3~3.9
NOISE LEVEL (DB)	61	63	69
HOSE LENGTH (FT)	10	10	10
PRESSURE	10 PSI	10 PSI	10 PSI
OVERHEAT AUTO SHUT-OFF PROTECTION	Yes	Yes	Yes
GAS LEAK CUT-OFF PROTECTION	Yes	Yes	Yes
HEIGHT ADJUSTABLE	No	Yes	Yes
PRIMARY SAFETY CONTROL	Gas Leak Cut-Off Protection	Gas Leak Cut-Off Protection	Gas Leak Cut-Off Protection
IGNITOR TYPE	Piezo Ignitor	Automatic Electric Spark	Automatic Electric Spark
PARTS INCLUDED	Regulator & Hose Assembly	Regulator & Hose Assembly	Regulator & Hose Assembly
VARIABLE HEATING SETTING	No	Yes	Yes
SAFETY CERTIFICATION	CSA	CSA	CSA
WARRANTY	1 Year Limited Warranty	1 Year Limited Warranty	1 Year Limited Warranty

HEXAGO



PRODUCT NAME	125,000 BTU Adjustable Forced Air Propane Gas Heater	150,000 BTU Adjustable Forced Air Propane Gas Heater
MODEL NUMBER	HI-HEAT-GAS-125K	HI-HEAT-GAS-150K
ENVIRONMENT THAT PRODUCT SUITABLE FOR	With proper ventilation it can be used in both commercial or construction sites both indoor and outdoor; not exposed to rain and snow weather	
HEATS COVERAGE AREA (SQ. FT)	1,875 - 3,125	2,000 - 3,750
MAX BTU	125,000	150,000
MIN BTU	75,000	85,000
CFM (REFERENCE ONLY)	352	352
CARTON GROSS WEIGHT (LBS)	17.86	21.61
PRODUCT NET WEIGHT (LBS)	13.01	16.53
PRODUCT NET DIMENSION (INCH)	20*8.86*14.96	25.59*10.24*15.55
CORD LENGTH (INCH)	5	5
CORD TYPE	SJTW	SJTW
PLUG TYPE	5-15P	5-15P
PRIMARY MATERIAL	Steel coated with nti-rusted powder	Steel coated with nti-rusted powder
POWER SUPPLY	115V/60HZ	115V/60HZ
AMPS	1.6 A	1.6 A
POWER RATE	90W	90W
FUEL TYPE	Propane	Propane
FUEL CONSUMING RATE (LB/HR)	3.5~5.8	3.7~7.0
NOISE LEVEL (DB)	69	69
HOSE LENGTH (FT)	10	10
PRESSURE	20 PSI	20 PSI
OVERHEAT AUTO SHUT-OFF PROTECTION	Yes	Yes
GAS LEAK CUT-OFF PROTECTION	Yes	Yes
HEIGHT ADJUSTABLE	Yes	Yes
PRIMARY SAFETY CONTROL	Gas Leak Cut-Off Protection	Gas Leak Cut-Off Protection
IGNITOR TYPE	Automatic Electric Spark	Automatic Electric Spark
PARTS INCLUDED	Regulator & Hose Assembly	Regulator & Hose Assembly
VARIABLE HEATING SETTING	Yes	Yes
SAFETY CERTIFICATION	CSA	CSA
WARRANTY	1 Year Limited Warranty	1 Year Limited Warranty

FORCED AIR KEROSENE HEATERS

The Hexago Forced Air Kerosene Heaters heat up well-ventilated construction sites, workshops, farms, or garages in the winter. It delivers efficient, professional-grade performance for residential and commercial applications, heating up from 1250 to 5250 square feet. The heater runs on efficient, clean-burning kerosene, 1-K kerosene is the recommended fuel due to the refinement to eliminate contaminants. CSA certified to run on multi-fuel such as #1 & #2 Diesel Fuel, JP8/Jet A Fuel and #1 & #2 Fuel Oil. Additional ventilation should be considered when using fuels other than 1-K Kerosene.



HI-HEAT-KERO-50K
HI-HEAT-KERO-75K

Heating Coverage Operating Time
1,250 / 1,875 sqft 12.6 / 8.6 hours

Temperature Setting Range (Thermostat Included)
40°F - 110°F

- Kerosene heaters offer stronger heat and warm up the worksite faster. Max Outlet Temp 1300°F.

Tank Capacity
5 gallons

- 1-K Kerosene is recommended, Other fuels such as #1 or #2 fuel oil, JP8, #1 and #2 diesel oil can be used.
- Fuel Tank attached under the heater.
- Fuel Tank Gauge indicate the amount of fuel in the tank.



HI-HEAT-KERO-125K
HI-HEAT-KERO-175K
HI-HEAT-KERO-210K

Heating Coverage Operating Time
3,125 / 4,375 / 5,250 sqft 9.5 / 10 / 8.3 hours

Temperature Setting Range (Thermostat Included)
40°F - 110°F

- Kerosene heaters offer stronger heat and warm up the worksite faster. Max Outlet Temp 1300°F.

Tank Capacity
9 / 13.2 / 13.2 gallons

- 1-K Kerosene is recommended, Other fuels such as #1 or #2 fuel oil, JP8, #1 and #2 diesel oil can be used.
- Fuel Tank attached under the heater.
- Fuel Tank Gauge indicate the amount of fuel in the tank.



HEXAGO



PRODUCT NAME	50,000 BTU Portable Forced Air Kerosene Heater	75,000 BTU Portable Forced Air Kerosene Heater
MODEL NUMBER	HI-HEAT-KERO-50K	HI-HEAT-KERO-75K
ENVIRONMENT THAT PRODUCT SUITABLE FOR	With proper ventilation it can be used in both commercial or construction sites both indoor and outdoor; not exposed to rain and snow weather	
HEATS INPUT (BTU/HR)	50000	75000
HEATS COVERAGE AREA (SQ. FT)	1250 sqft	1875 sqft
CFM (REFERENCE ONLY)	180	280
CARTON GROSS WEIGHT (LBS)	34.3	34.3
PRODUCT NET WEIGHT (LBS)	30.8	30.8
PRODUCT NET DIMENSION (INCH)	29.53*12.4*15.75	29.53*12.4*15.75
POWER CORD LENGTH (INCH)	5	5
CORD TYPE	SJTOW	SJTOW
PLUG TYPE	5-15P	5-15P
PRIMARY MATERIAL	Steel coated with anti-rusted powder	Steel coated with anti-rusted powder
NOISE LEVEL (DB)	76	76
WHEEL DIAMETER	-	-
WHEEL	-	-
FUEL TYPE	1-K kerosene is the recommended fuel due to the refinement to eliminate contaminants. Other fuels such as #1 or #2 fuel oil, JP8, #1 and #2 diesel oil can be used, but do not burn as clean as 1-K kerosene.	
FUEL CONSUMPTION (GALLON/HOUR)	0.40	0.58
FUEL TANK CAPACITY (GALLONS)	5.0	5.0
OPERATING TIME (HOURS)	12.6	8.6
POWER SUPPLY (VOLTAGE/HZ/PHASE)	120V/60HZ/1	120V/60HZ/1
POWER	250W	250W
AMPS	2.5A	2.5A
PRESSURE SETTING (PSI)	3.8	4.2
MAX OUTLET TEMP	1300°F	1300°F
THERMOSTAT	Yes	Yes
TEMPERATURE SETTING RANGE	40°F - 110°F	40°F - 110°F
SPARK GENERATOR	Igniter 15KV	Igniter 15KV
FUEL TANK GAUGE	Yes	Yes
HANDLE	Yes	Yes
PRIMARY SAFETY CONTROL	Solid State Control	Solid State Control
SAFETY CERTIFICATION	CSA	CSA
WARRANTY	1 Year Limited Warranty	1 Year Limited Warranty

HEXAGO



PRODUCT NAME	125,000 BTU Portable Forced Air Kerosene Heater	175,000 BTU Portable Forced Air Kerosene Heater	210,000 BTU Portable Forced Air Kerosene Heater
MODEL NUMBER	HI-HEAT-KERO-125K	HI-HEAT-KERO-175K	HI-HEAT-KERO-210K
ENVIRONMENT THAT PRODUCT SUITABLE FOR	With proper ventilation it can be used in both commercial or construction sites both indoor and outdoor; not exposed to rain and snow weather		
HEATS INPUT (BTU/HR)	125000	175000	210000
HEATS COVERAGE AREA (SQ. FT)	3125 sqft	4375 sqft	5250 sqft
CFM (REFERENCE ONLY)	460	650	650
CARTON GROSS WEIGHT (LBS)	50.6	64.9	64.9
PRODUCT NET WEIGHT (LBS)	46.2	57.2	57.2
PRODUCT NET DIMENSION (INCH)	34.65*17.95*24.80	41.34*19.29*24.21	41.34*19.29*24.21
POWER CORD LENGTH (INCH)	5	5	5
CORD TYPE	SJTOW	SJTOW	SJTOW
PLUG TYPE	5-15P	5-15P	5-15P
PRIMARY MATERIAL	Steel coated with anti-rusted powder		
NOISE LEVEL (DB)	76	76	76
WHEEL DIAMETER	7.76"	7.76"	7.76"
WHEEL	7.76 Inch Flat Free Tires	7.76 Inch Flat Free Tires	7.76 Inch Flat Free Tires
FUEL TYPE	1-K kerosene is the recommended fuel due to the refinement to eliminate contaminants. Other fuels such as #1 or #2 fuel oil, JP8, #1 and #2 diesel oil can be used, but do not burn as clean as 1-K kerosene.		
FUEL CONSUMPTION (GALLON/HOUR)	0.95	1.32	1.59
FUEL CONSUMPTION (GALLON/HOUR)	9.0	13.2	13.2
OPERATING TIME (HOURS)	9.5	10.0	8.3
POWER SUPPLY (VOLTAGE/HZ/PHASE)	120V/60HZ/1	120V/60HZ/1	120V/60HZ/1
POWER	340W	480W	480W
AMPS	3.5A	4.5A	4.5A
PRESSURE SETTING (PSI)	6.8	6.3	7.2
MAX OUTLET TEMP	1300°F	1300°F	1300°F
THERMOSTAT	Yes	Yes	Yes
TEMPERATURE SETTING RANGE	40°F - 110°F	40°F - 110°F	40°F - 110°F
SPARK GENERATOR	Igniter 15KV	Igniter 15KV	Igniter 15KV
FUEL TANK GAUGE	Yes	Yes	Yes
HANDLE	Yes	Yes	Yes
PRIMARY SAFETY CONTROL	Solid State Control	Solid State Control	Solid State Control
SAFETY CERTIFICATION	CSA	CSA	CSA
WARRANTY	1 Year Limited Warranty	1 Year Limited Warranty	1 Year Limited Warranty

ELECTRIC GARAGE HEATERS

The Hexago Electric Garage Heater delivers powerful and reliable heat for ventilated spaces. It keeps your space comfortably warm all season long. Heavy-duty design built and it's the ideal heating solution for your garage, warehouse, or workshop. The space-saving and ceiling-mount design allow you to tilt the heater vertically and/or swing it horizontally. Includes the remote control for across the room convenience.



HI-HEAT-EGH-REMT-5000
HI-HEAT-EGH-REMT-7500
HI-HEAT-EGH-REMT-10000


Heating Coverage BTU
426 / 640 / 853 sqft **17,060 / 25,590 / 34,120**

Heat Settings
3000 ~ 5000w / 5300 ~ 7500w / 7500 ~ 10000w

CFM Noise Level Power Supply
636 / 636 / 955 **65 / 65 / 68 dB** **240v / 60Hz**

Temperature Contorller Range (Thermostat Built in) Temperature Precision
45°F - 99°F **±1°F**

- Energy Saving Mode : Heater will automatically adjust to low power when the room temperature is 2°F below the setting temperature.
- Automatic Fan Off Delay : Fan will keep running 3 mins to cool the heater after the heating element stopped.

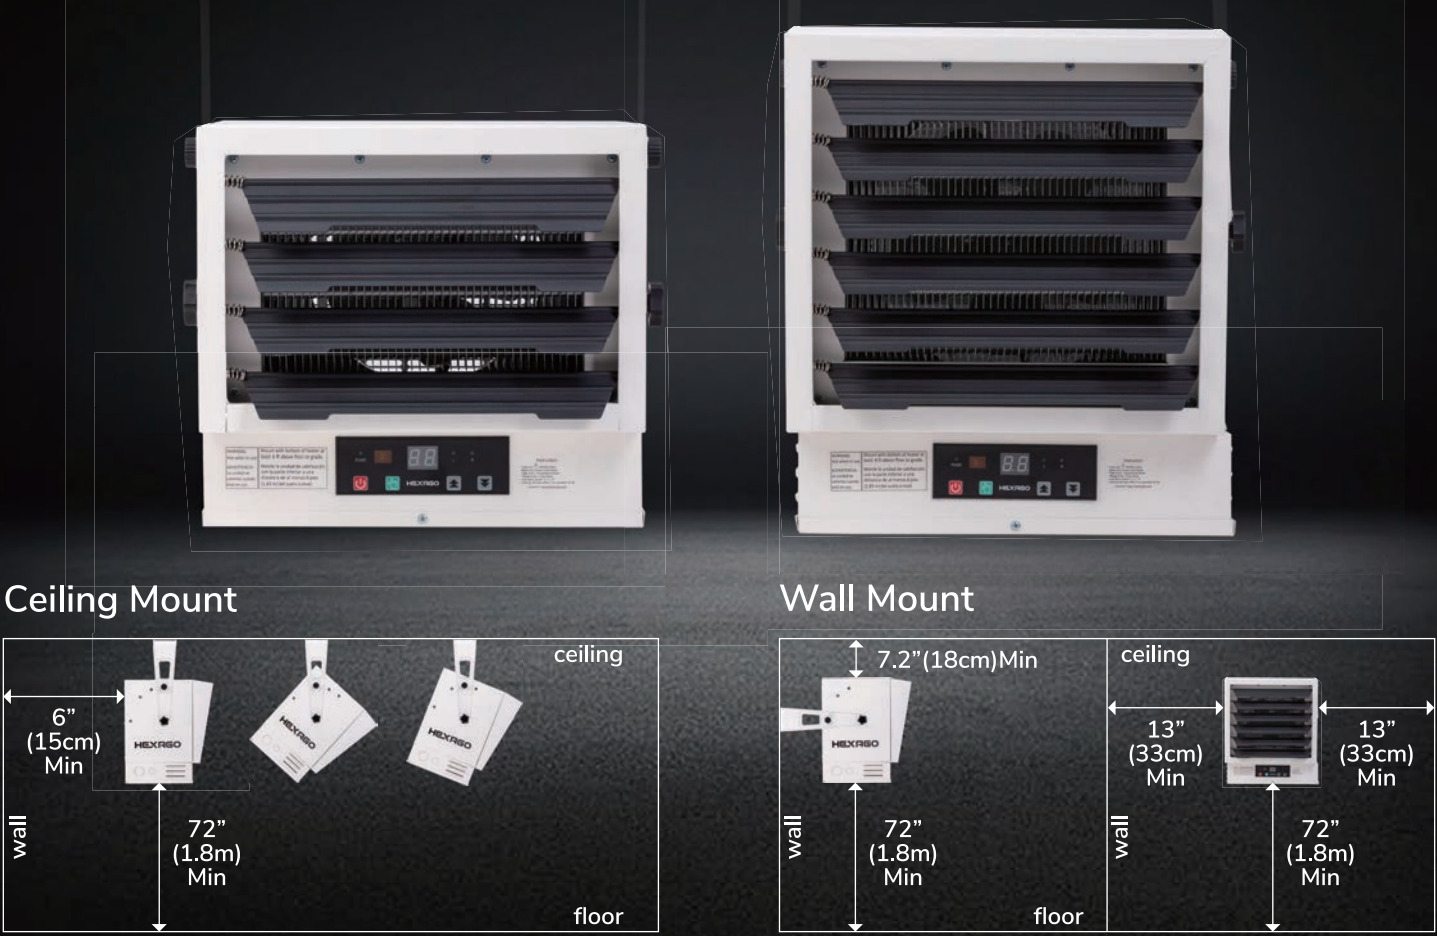

*Indoor Use Only

HEXAGO



PRODUCT NAME	5,000W Electric Remote Garage Heater	7,500W Electric Remote Garage Heater	10,000W Electric Remote Garage Heater
MODEL NUMBER	HI-HEAT-EGH-REMT-5000	HI-HEAT-EGH-REMT-7500	HI-HEAT-EGH-REMT-10000
ENVIRONMENT THAT PRODUCT SUITABLE FOR	Indoor Only	Indoor Only	Indoor Only
BTU	17060	25590	34120
HEATS COVERAGE AREA (SQ. FT)	426 sqft	640 sqft	853 sqft
CFM (REFERENCE ONLY)	636	636	955
CARTON GROSS WEIGHT (LBS)	22.38	22.82	32.19
PRODUCT NET WEIGHT (LBS)	19.62	20.06	28.44
CARTON DIMENSION (INCH)	17.72*14.57*16.54	17.72*14.57*16.54	18.5*17.91*21.06
PRODUCT NET DIMENSION (INCH)	13.98*10.63*12.76	13.98*10.63*12.76	14.57*14.41*17.01
PRIMARY MATERIAL	Steel coated with anti-rusted powder		
TEMPERATURE CONTROLLER RANGE	45-99°F (7-37°C)	45-99°F (7-37°C)	45-99°F (7-37°C)
TEMPERATURE PRECISION	±1°F	±1°F	±1°F
NOISE LEVEL (DB)	65	65	68
HEAT SETTINGS (WATTS)	3000/5000W	5300/7500W	7500/10000W
POWER SUPPLY (VOLTAGE/HZ)	240V/60HZ	240V/60HZ	240V/60HZ
AMPS	21 A	31.25 A	42 A
PHASE	Single	Single	Single
PLUG TYPE	Hardwired Required	Hardwired Required	Hardwired Required
MINIMUM CIRCUIT AMPACITY (MCA)	30 A	40 A	50 A
REMOTE CONTROL INCLUDED	Yes	Yes	Yes
THERMOSTAT	Yes, Built-In	Yes, Built-In	Yes, Built-In
BATTERIES NEEDED OF REMOTE	2 x AAA (Not included due to shipping safety)		
HIGH TEMPERATURE THERMAL CUT-OFF	Yes	Yes	Yes
AUTOMATIC FAN DELAY AFTER TURN OFF	Yes	Yes	Yes
ENERGY SAVING MODE	Yes	Yes	Yes
DISCHARGE	Horizontal	Horizontal	Horizontal
BUS WIRE GAUGE	Minimum 10 gauge SJO or SJTO copper type wiring required	Minimum 8 gauge SJO or SJTO copper type wiring required	Minimum 6 gauge SJO or SJTO copper type wiring required
SAFETY CERTIFICATION	ETL	ETL	ETL
SAFETY WARNING	Keep electrical cords, drapery, furnishings and other combustibles at least 3 feet (0.9 m) from heater to prevent risk of fire.	Keep electrical cords, drapery, furnishings and other combustibles at least 3 feet (0.10 m) from heater to prevent risk of fire.	Keep electrical cords, drapery, furnishings and other combustibles at least 3 feet (0.11 m) from heater to prevent risk of fire.
WARRANTY	1 Year Limited Warranty	1 Year Limited Warranty	1 Year Limited Warranty

HEXAGO

2022 HEATER COLLECTION

HEXAGO LLC

WWW.THEHEXAGO.COM

SALES@THEHEXAGO.COM